

**TECNOSYSTEM**

**FLESSIBILE**



## FLEX DP ROT

### Tubo flessibile in rotolo

Tubo flessibile doppia parete in inox AISI 316.



| Ø   | M / rot.      |
|-----|---------------|
| 60  | 30            |
| 80  | 30            |
| 100 | 30            |
| 110 | 30            |
| 120 | 30            |
| 130 | 30            |
| 140 | 30            |
| 150 | 30            |
| 160 | 30            |
| 180 | 30            |
| 200 | 25            |
| 220 | 25            |
| 250 | 20            |
| 300 | barre da 3 m. |

## FLEX DP SCAT

### Tubo flessibile in dispenser

Tubo flessibile doppia parete in inox AISI 316



| Ø   | M / scat. |
|-----|-----------|
| 80  | 60        |
| 100 | 60        |
| 110 | 60        |
| 120 | 50        |
| 130 | 50        |
| 140 | 35        |
| 150 | 30        |
| 160 | 27        |
| 180 | 25        |
| 200 | 20        |

## IMBALLAGGIO



FILM



SCATOLA NORMALE



SCATOLA SVOLGITUBO


### FLEX.RM

#### Giunto flessibile maschio

Giunto flessibile rigido maschio in INOX AISI 316L.



| Dn  | A   | B  | C  |
|-----|-----|----|----|
| 80  | 138 | 50 | 54 |
| 100 | 138 | 50 | 54 |
| 110 | 138 | 50 | 54 |
| 120 | 138 | 50 | 54 |
| 130 | 138 | 50 | 54 |
| 140 | 138 | 50 | 54 |

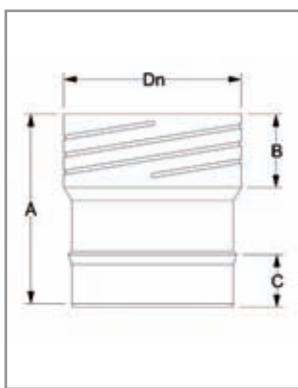

|     |     |    |    |
|-----|-----|----|----|
| 150 | 138 | 50 | 54 |
| 160 | 138 | 50 | 54 |
| 180 | 138 | 50 | 54 |
| 200 | 138 | 50 | 54 |
| 220 | 138 | 50 | 54 |
| 250 | 138 | 50 | 54 |
| 300 | 138 | 50 | 54 |


### FLEX.RF

#### Giunto flessibile femmina

Giunto flessibile rigido femmina in INOX AISI 316L.



| Dn  | A   | B  | C  |
|-----|-----|----|----|
| 80  | 135 | 50 | 85 |
| 100 | 135 | 50 | 85 |
| 110 | 135 | 50 | 85 |
| 120 | 135 | 50 | 85 |
| 130 | 135 | 50 | 85 |
| 140 | 135 | 50 | 85 |

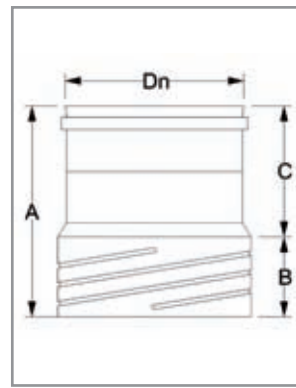

|     |     |    |    |
|-----|-----|----|----|
| 150 | 135 | 50 | 85 |
| 160 | 135 | 50 | 85 |
| 180 | 135 | 50 | 85 |
| 200 | 135 | 50 | 85 |
| 220 | 135 | 50 | 85 |
| 250 | 135 | 50 | 85 |
| 300 | 135 | 50 | 85 |


### FLEX.GFF

#### Giunto flex-flex

Giunto flex-flex in INOX AISI 316L.



| Dn  | A   | B  | C  |
|-----|-----|----|----|
| 80  | 137 | 50 | 37 |
| 100 | 137 | 50 | 37 |
| 110 | 137 | 50 | 37 |
| 120 | 137 | 50 | 37 |
| 130 | 137 | 50 | 37 |
| 140 | 137 | 50 | 37 |

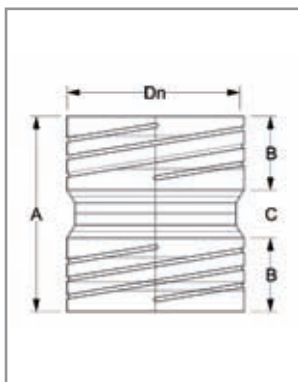

|     |     |    |    |
|-----|-----|----|----|
| 150 | 137 | 50 | 37 |
| 160 | 137 | 50 | 37 |
| 180 | 137 | 50 | 37 |
| 200 | 137 | 50 | 37 |
| 220 | 137 | 50 | 37 |
| 250 | 137 | 50 | 37 |
| 300 | 137 | 50 | 37 |


### FLEX.GFFA

#### Giunto flex-flex con invito anticondensa

Giunto flex-flex con invito interno anticondensa in INOX AISI 316L.



| Dn  | A   | B  | C  |
|-----|-----|----|----|
| 80  | 161 | 73 | 67 |
| 100 | 161 | 73 | 67 |
| 110 | 161 | 73 | 67 |
| 120 | 161 | 73 | 67 |
| 130 | 161 | 73 | 67 |
| 140 | 161 | 73 | 67 |

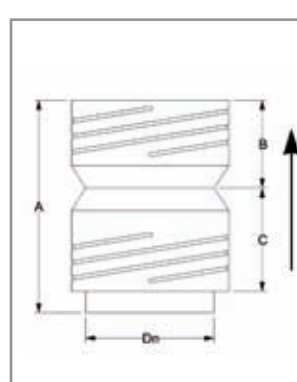


|     |     |    |    |
|-----|-----|----|----|
| 150 | 161 | 73 | 67 |
| 160 | 161 | 73 | 67 |
| 180 | 161 | 73 | 67 |
| 200 | 161 | 73 | 67 |
| 220 | 161 | 73 | 67 |
| 250 | 161 | 73 | 67 |
| 300 | 161 | 73 | 67 |

## FLEX.GRFA

### Giunto flessibile con invito anticondensa femmina

Giunto flessibile rigido femmina con invito anticondensa in INOX AISI 316L.

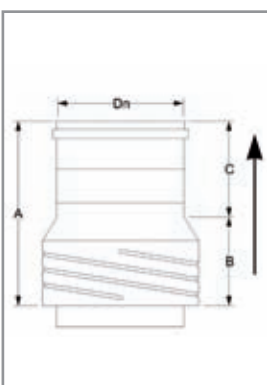

| Dn  | A   | B  | C  |
|-----|-----|----|----|
| 80  | 161 | 73 | 67 |
| 100 | 161 | 73 | 67 |
| 110 | 161 | 73 | 67 |
| 120 | 161 | 73 | 67 |
| 130 | 161 | 73 | 67 |
| 140 | 161 | 73 | 67 |
| 150 | 161 | 73 | 67 |
| 160 | 161 | 73 | 67 |
| 180 | 161 | 73 | 67 |
| 200 | 161 | 73 | 67 |
| 220 | 161 | 73 | 67 |
| 250 | 161 | 73 | 67 |
| 300 | 161 | 73 | 67 |